

■ 外形寸法 (全閉外扇形・脚取付 KEB38 シリーズ 連続定格)




図 1






図 2



枠番号	出 力 (kW)		図番号	寸 法 (mm)																		
				A	B	C	D	E	F	G	H	I	J	K	L	M	N	R	Z (Z1×Z2)	XB	JK	EA
	4極	6 極																				
71M	0.4	0.2	1	163	85	71	154	56	45	8	148	-	28	35	283	140	120	120	8×10	45	5	-
80M	0.75	0.4	2	195	95	80	172	62.5	50	4.5	165	-	35	30	335	165	130	140	10×8	50	8	-
90L	1.5	0.75	3	225.5	113.5	90	202	70	62.5	10	191	-	40	40	394	176	149	168.5	10×12	56	5	-
100L	2.2	-		249	128	100	202	80	70	12	201	239.5	40	46	442	200	168	193	12×14	63	5	22
	-	1.5		278	128	100	202	80	70	12	201	239.5	40	46	471	200	168	193	12×14	63	5	22
112M	3.7	-		261	134	112	243	95	70	12	233.5	263.5	40	44	461	220	168	200	12×14	70	5	23
	-	2.2		296	134	112	243	95	70	12	233.5	263.5	40	44	496	220	168	200	12×14	70	5	23
132S	5.5	3.7	4	300	152	132	285	108	70	15	274.5	313	50	50	539	260	175	239	12×14	89	5	24
132M	7.5	5.5		324	171	132	285	108	89	15	274.5	313	50	50	582	260	213	258	12×14	89	5	24
160M	11	7.5		399	206	160	324	127	105	18	322	365.5	60	60	722	308	250	323	14.5×18.5	108	5	22
160L	15	11		399	228	160	324	127	127	18	322	365.5	60	60	744	308	294	345	14.5×18.5	108	5	-
	18.5 22	15		446	236.5	180	391	139.5	120.5	20	375.5	434	60	82.5	797.5	324	286	351.5	14.5	121	-	-
180L	30	18.5 22	4	505	255.5	180	391	139.5	139.5	20	375.5	434	60	82.5	875.5	324	324	370.5	14.5	121	-	20
200L	37 45	30		579	280.5	200	441	159	152.5	20	419	478	80	100	1004.5	378	360	425.5	18.5	133	-	40

■ 外形寸法 (全閉外扇形・フランジ取付 KEB38 シリーズ 連続定格)




図 1

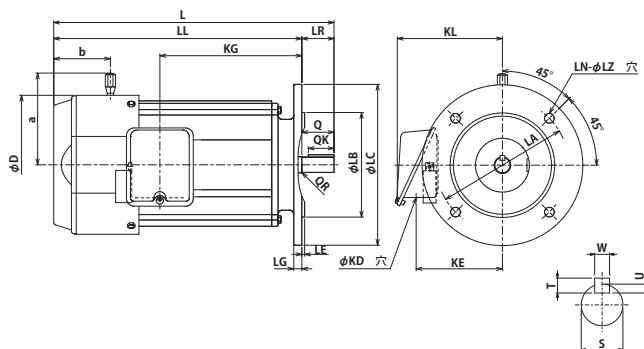



図 2

枠番号	出 力 (kW)		図番号	寸 法 (mm)																		
				D	IE	IC	IG	IL	L	LL	LR	a オプション	b オプション	端子箱				フランジ				
	KD	KE												KG	KL	LA	LB	LC	LE	LG		
71M	0.4	-	1	154	-	160	-	-	304	274	30	105.5	68	-	-	149	-	130	110	160	3.5	9
80M	0.75	0.4	2	172	-	-	-	-	348.5	308.5	40	114	70.5	22	105.5	176.5	132	165	130	200	3.5	10
90L	1.5	0.75	3	202	-	88.5	-	-	394	344	50	128	77.8	27	131.5	188.5	158	165	130	200	3.5	10
100L	2.2	-		202	122	98	37.5	224	442	382	60	128	77.8	27	131.5	226.5	158	215	180	250	4	16
	-	1.5		202	122	98	37.5	224	471	411	60	128	88.6	27	131.5	226.5	158	215	180	250	4	16
112M	3.7	-		243	134	110	47	228.5	461	401	60	168	81.6	27	150.5	235	177	215	180	250	4	13
	-	2.2		243	134	110	47	228.5	496	436	60	168	89.6	27	150.5	235	177	215	180	250	4	13
132S	5.5	3.7	4	285	155	130	61	252.5	539	459	80	176	96	35	184	244	214.5	265	230	300	4	12
132M	7.5	5.5		285	155	130	61	202	582	502	80	225	108.8	35	184	282	214.5	265	230	300	4	12
160M	11	7.5		324	179.5	154.5	54	235	722	612	110	230	112.2	52	226.5	339	279.5	300	250	350	5	14
160L	15	11		324	179.5	154.5	54	235	744	634	110	235	117.5	52	226.5	339	279.5	300	250	350	5	14
	18.5	-		391	255	-	-	241.5	797.5	687.5	110	256	139.3	91	280	241.5	345	350	300	400	5	15
180M	22	15	4	391	255	-	-	280.5	875.5	765.5	110	256	139.3	91	280	280.5	345	350	300	400	5	15
180L	30	18.5		441	279	-	-	325.5	1004.5	864.5	140	335	155.2	91	280	325.5	365	400	350	450	5	19
200L	37	30																				
	45	-																				

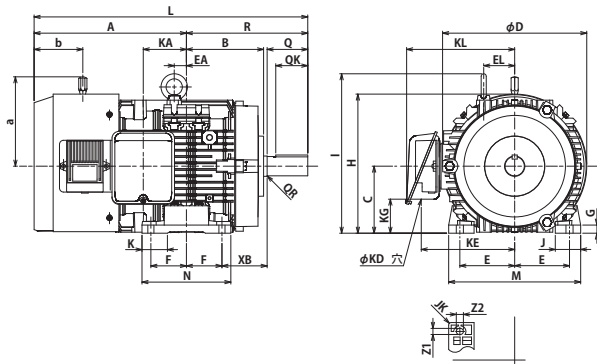


図3


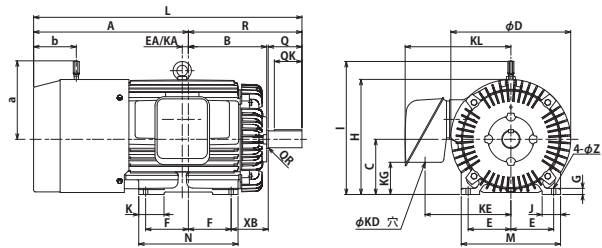


図4



軸端部共通

寸 法 (mm)														ベアリング番号		概略重量 (kg)		枠番号	
EL	a オプション	b オプション	端子箱					軸 端					4 極以上						
			KA	KD	KE	KG	KL	Q	QK	QR	S	W	T	U	負荷側	反負荷側	4 極		6 極
-	184	62.5	-	-	-	-	106	30	22	1.3	14	5	5	3	6203C3	6203C3	10	10	71M
-	114	70.6	64	22	121	69	146	40	32	0.5	19	6	6	3.5	6204C3	6204C3	20	16.7	80M
-	128	77.8	70	27	131.5	49	158	50	40	0.5	24	8	7	4	6205C3	6205C3	26.5	23.5	90L
37.5	128	77.8	93.5	27	131.5	59	158	60	45	0.5	28	8	7	4	6206C3	6205C3	37.2	-	100L
37.5	128	88.6	93.5	27	131.5	59	158	60	45	0.5	28	8	7	4	6206C3	6205C3	-	40.2	
47	168	81.6	95	27	150.5	71	177	60	45	1.5	28	8	7	4	6207C3	6206C3	50.6	-	112M
47	168	89.6	95	27	150.5	71	177	60	45	1.5	28	8	7	4	6207C3	6206C3	-	55.7	
61	176	96	85	35	184	67	214.5	80	63	0.5	38	10	8	5	6308C3	6208C3	76.2	75.2	132S
61	225	108.8	104	35	184	67	214.5	80	63	0.5	38	10	8	5	6308C3	6208C3	87.7	90.7	132M
54	225	112.2	126	52	226.5	70	279.5	110	90	2	42	12	8	5	6310C3	6208C3	126.2	120.2	160M
54	235	117.5	104	52	226.5	70	279.5	110	90	2	42	12	8	5	6310C3	6208C3	143.2	140.2	160L
-	256	139.3	-	91	280	105	345	110	90	0.5	48	14	9	5.5	6310C3	6310C3	217.5 222.5	207.5	180M
-	256	139.3	20	91	280	105	345	110	90	1.5	55	16	10	6	6312C3	6310C3	267.5	247.5 262.5	180L
-	335	155.2	40	91	280	135	365	140	110	1.5	60	18	11	7	6313C3	6312C3	376.5	381.5	200L

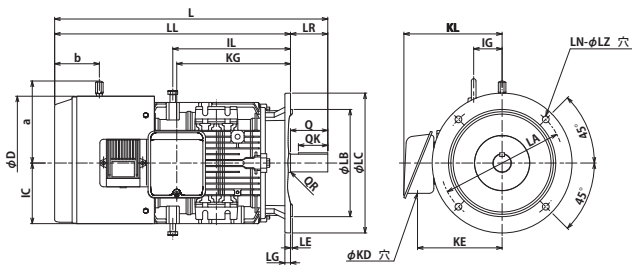


図3


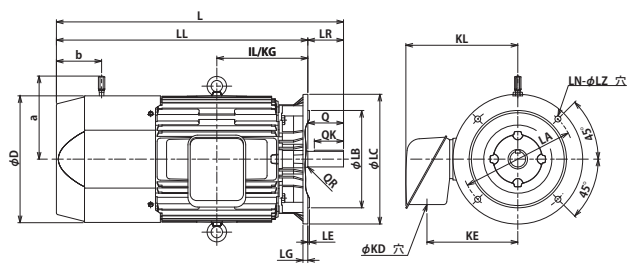


図4



軸端部共通

寸 法 (mm)									フランジ 番号	ベアリング番号		概略重量 (kg)		枠番号
フランジ		軸 端								4 極以上				
LN	LZ	Q	QK	QR	S	W	T	U		負荷側	反負荷側	4 極	6 極	
4	10	30	22	1.3	14	5	5	3	FF130	6203C3	6203C3	12	12	71M
4	12	40	32	0.5	19	6	6	3.5	FF165	6204C3	6204C3	19	15.5	80M
4	12	50	40	0.5	24	8	7	4	FF165	6205C3	6205C3	27.5	24.5	90L
4	14.5	60	45	0.5	28	8	7	4	FF215	6206C3	6205C3	35.2	-	100L
4	14.5	60	45	0.5	28	8	7	4	FF215	6206C3	6205C3	-	43.5	
4	14.5	60	45	1.5	28	8	7	4	FF215	6207C3	6206C3	52.6	-	112M
4	14.5	60	45	1.5	28	8	7	4	FF215	6207C3	6206C3	-	58.6	
4	14.5	80	63	0.5	38	10	8	5	FF265	6308C3	6208C3	79.2	78.2	132S
4	14.5	80	63	0.5	38	10	8	5	FF265	6308C3	6208C3	90.7	93.7	132M
4	18.5	110	90	2	42	12	8	5	FF300	6310C3	6208C3	131.2	125.2	160M
4	18.5	110	90	2	42	12	8	5	FF300	6310C3	6208C3	148.2	145.2	160L
4	18.5	110	90	0.5	48	14	9	5.5	FF350	6310C3	6310C3	227.5	217.5	180M
												232.5		
4	18.5	110	90	1.5	55	16	10	6	FF350	6312C3	6310C3	277.5	257.5	180L
												272.5		
8	18.5	140	110	1.5	60	18	11	7	FF400	6313C3	6312C3	386.5	391.5	200L