

## ■ 外形寸法（全閉外扇形・脚取付 AB-H シリーズ 連続定格）

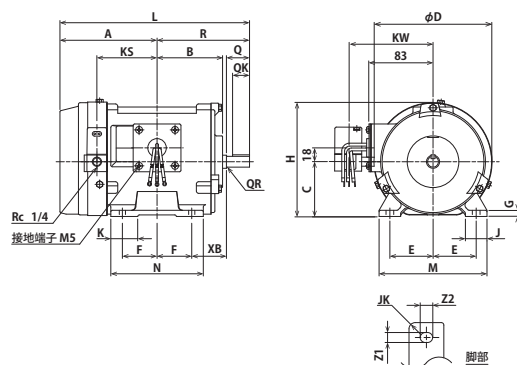


図1

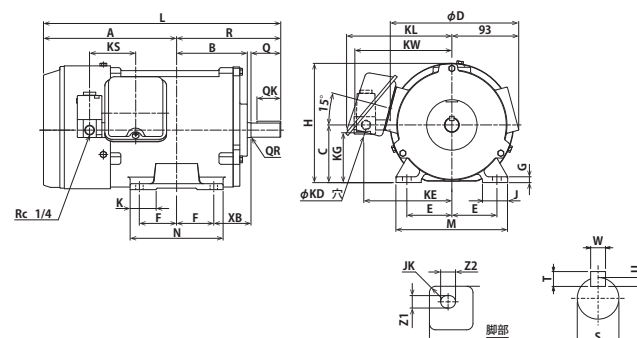


図2

| ★ | 枠番号  | 出力 (kW) |            |      | 図番号 | 寸 法 (mm) |       |     |     |       |       |    |       |       |    |      |       |     |     |       |              |     |    |
|---|------|---------|------------|------|-----|----------|-------|-----|-----|-------|-------|----|-------|-------|----|------|-------|-----|-----|-------|--------------|-----|----|
|   |      | 2極      | 4極         | 6極   |     | A        | B     | C   | D   | E     | F     | G  | H     | I     | J  | K    | L     | M   | N   | R     | Z<br>(Z1×Z2) | XB  | JK |
|   | 63M  | 0.2     | 0.1/0.2    | -    |     | -        | -     | -   | -   | -     | -     | -  | -     | -     | -  | -    | -     | -   | -   | -     | -            | -   |    |
|   | 71M  | 0.4     | 0.4        | 0.2  | 1   | 126      | 85    | 71  | 154 | 56    | 45    | 8  | 148   | -     | 28 | 35   | 246   | 140 | 120 | 120   | 8×10         | 45  | 5  |
|   | 80M  | 0.75    | 0.75       | 0.4  | 2   | 179      | 95    | 80  | 172 | 62.5  | 50    | 8  | 166   | -     | 35 | 35   | 319   | 155 | 125 | 140   | 10×12        | 50  | 5  |
|   | 90L  | 1.5/2.2 | 1.5        | 0.75 |     | 198.5    | 113.5 | 90  | 202 | 70    | 62.5  | 10 | 191   | -     | 40 | 40   | 367   | 176 | 149 | 168.5 | 10×12        | 56  | 5  |
|   | 100L | -       | 2.2        | -    | 3   | 222      | 128   | 100 | 202 | 80    | 70    | 12 | 201   | 239.5 | 40 | 46   | 415   | 200 | 168 | 193   | 12×14        | 63  | 5  |
|   |      | -       | -          | 1.5  |     | 252      | 128   | 100 | 202 | 80    | 70    | 12 | 201   | 239.5 | 40 | 46   | 445   | 200 | 168 | 193   | 12×14        | 63  | 5  |
|   | 112M | 3.7     | 3.7        | -    |     | 247      | 134   | 112 | 243 | 95    | 70    | 12 | 233.5 | 263.5 | 40 | 44   | 447   | 220 | 168 | 200   | 12×14        | 70  | 5  |
|   |      | -       | -          | 2.2  |     | 290      | 134   | 112 | 243 | 95    | 70    | 12 | 233.5 | 263.5 | 40 | 44   | 490   | 220 | 168 | 200   | 12×14        | 70  | 5  |
|   | 132S | -       | 5.5        | 3.7  |     | 257      | 152   | 132 | 285 | 108   | 70    | 15 | 274.5 | 313   | 50 | 50   | 496   | 260 | 175 | 239   | 12×14        | 89  | 5  |
|   | 132M | -       | 7.5        | 5.5  |     | 276      | 171   | 132 | 285 | 108   | 89    | 15 | 274.5 | 313   | 50 | 50   | 534   | 260 | 213 | 258   | 12×14        | 89  | 5  |
|   | 160M | -       | 11         | 7.5  |     | 367      | 206   | 160 | 324 | 127   | 105   | 18 | 322   | 365.5 | 60 | 60   | 690   | 308 | 250 | 323   | 14.5×18.5    | 108 | 5  |
|   | 160L | -       | 15         | 11   | 4   | 345      | 228   | 160 | 324 | 127   | 127   | 18 | 322   | 365.5 | 60 | 60   | 690   | 308 | 294 | 345   | 14.5×18.5    | 108 | 5  |
|   | 180M | -       | 18.5<br>22 | 15   |     | 396      | 236.5 | 180 | 391 | 139.5 | 120.5 | 20 | 375.5 | 434   | 60 | 82.5 | 747.5 | 324 | 286 | 351.5 | 14.5         | 121 | -  |

★63MについてはP.24～25を参照下さい。

## ■ 外形寸法（全閉外扇形・フランジ取付 AB-H シリーズ 連続定格）




図1

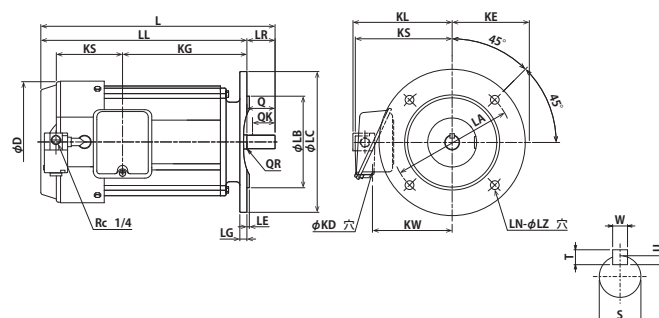


図2

| ★    | 枠番号  | 出力<br>(kW) |      |      | 図番号 | 寸 法 (mm) |       |       |       |       |       |       |     |       |     |       |       |       |     |      |     |     |     |
|------|------|------------|------|------|-----|----------|-------|-------|-------|-------|-------|-------|-----|-------|-----|-------|-------|-------|-----|------|-----|-----|-----|
|      |      |            |      |      |     | D        | IE    | IC    | IG    | IL    | L     | LL    | LR  | KS    | KW  | 端子箱   |       |       |     | フランジ |     |     |     |
|      |      | KD         | KE   | KG   |     |          |       |       |       |       |       |       |     |       |     | KL    | LA    | LB    | LC  | LE   |     |     |     |
|      | 63M  | 0.2        | 0.2  | -    |     | -        | -     | -     | -     | -     | -     | -     | -   | -     | -   | -     | -     | -     | -   | -    | -   | -   | -   |
|      | 71M  | 0.4        | 0.4  | -    | 1   | 154      | -     | -     | -     | -     | 266   | 236   | 30  | -     | -   | -     | -     | 149   | -   | 130  | 110 | 160 | 3.5 |
|      | 80M  | 0.75       | 0.75 | 0.4  | 2   | 172      | -     | -     | -     | -     | 332.5 | 292.5 | 40  | 132   | 120 | 22    | 107   | 176.5 | 135 | 165  | 130 | 200 | 3.5 |
|      | 90L  | 1.5        | 1.5  | 0.75 | 3   | 202      | -     | 88.5  | -     | -     | 367   | 317   | 50  | 112.5 | 142 | 27    | 129.5 | 188.5 | 156 | 165  | 130 | 200 | 3.5 |
|      |      | 2.2        | -    | -    |     | 202      | -     | 88.5  | -     | -     | 397   | 347   | 50  | 94    | 142 | 27    | 129.5 | 188.5 | 156 | 165  | 130 | 200 | 3.5 |
|      | 100L | -          | 2.2  | -    |     | 202      | 122   | 98    | 37.5  | 224   | 415   | 355   | 60  | 112.5 | 142 | 27    | 129.5 | 224   | 156 | 215  | 180 | 250 | 4   |
|      |      | -          | -    | 1.5  |     | 202      | 122   | 98    | 37.5  | 224   | 445   | 385   | 60  | 80    | 140 | 27    | 129.5 | 224   | 156 | 215  | 180 | 250 | 4   |
| 112M | 3.7  | 3.7        | -    | 243  |     | 134      | 110   | 47    | 228.5 | 447   | 387   | 60    | 119 | 164   | 27  | 148.5 | 235   | 175   | 215 | 180  | 250 | 4   |     |
|      | -    | -          | 2.2  | 243  |     | 134      | 110   | 47    | 228.5 | 490   | 430   | 60    | 96  | 162   | 27  | 148.5 | 235   | 175   | 215 | 180  | 250 | 4   |     |
| 132S | -    | 5.5        | 3.7  | 285  |     | 155      | 130   | 61    | 252.5 | 496   | 416   | 80    | 141 | 178   | 35  | 181.5 | 244   | 212   | 265 | 230  | 300 | 4   |     |
| 132M | -    | 7.5        | 5.5  | 285  |     | 155      | 130   | 61    | 202   | 534   | 454   | 80    | 141 | 178   | 35  | 181.5 | 282   | 212   | 265 | 230  | 300 | 4   |     |
| 160M | -    | 11         | 7.5  | 324  |     | 179.5    | 154.5 | 54    | 235   | 690   | 580   | 110   | 121 | 224   | 52  | 226.5 | 339   | 279.5 | 300 | 250  | 350 | 5   |     |
| 160L | -    | 15         | 11   | 324  |     | 179.5    | 154.5 | 54    | 235   | 690   | 580   | 110   | 121 | 224   | 52  | 226.5 | 339   | 279.5 | 300 | 250  | 350 | 5   |     |
| 180M | -    | 18.5       | 15   | 391  | 255 | -        | -     | 241.5 | 747.5 | 637.5 | 110   | 254   | 239 | 91    | 280 | 241.5 | 345   | 350   | 300 | 400  | 5   |     |     |
|      |      | 22         |      |      |     |          |       |       |       |       |       |       |     |       |     |       |       |       |     |      |     |     |     |

★63MについてはP.24～25を参照下さい。

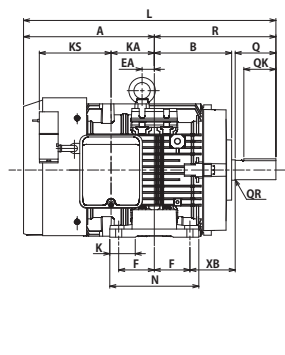


図3






図4

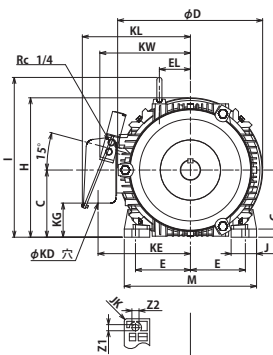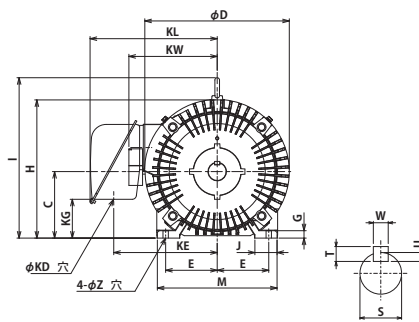

軸端部共通

| 寸 法 (mm) |      |       |       |      |    |       |     |       |     |    |     |    |    |   | ベアリング番号 |        | 概略重量 (kg) |            | 枠番号 |      |
|----------|------|-------|-------|------|----|-------|-----|-------|-----|----|-----|----|----|---|---------|--------|-----------|------------|-----|------|
| EA       | EL   | KS    | KW    | 端子箱  |    |       |     | 軸 端   |     |    |     |    |    |   | 4 極以上   |        | 4 極       | 6 極        |     |      |
|          |      |       |       | KA   | KD | KE    | KG  | KL    | Q   | QK | QR  | S  | W  | T | U       | 負荷側    |           |            |     | 反負荷側 |
| -        | -    | -     | -     | -    | -  | -     | -   | -     | -   | -  | -   | -  | -  | - | -       | -      | -         | -          | 63M |      |
| -        | -    | 78    | 128   | -    | -  | -     | -   | -     | 30  | 22 | 1.3 | 14 | 5  | 5 | 3       | 6203   | 6203      | -          | -   | 71M  |
| -        | -    | 62    | 134.5 | 64   | 22 | 121   | 69  | 145   | 40  | 32 | 0.5 | 19 | 6  | 6 | 3.5     | 6204C3 | 6204      | -          | -   | 80M  |
| -        | -    | 112.5 | 142   | 70   | 27 | 129.5 | 49  | 156   | 50  | 40 | 0.5 | 24 | 8  | 7 | 4       | 6205C3 | 6305      | 27         | 24  | 90L  |
| 22       | 37.5 | 112.5 | 142   | 93.5 | 27 | 129.5 | 59  | 156   | 60  | 45 | 0.5 | 28 | 8  | 7 | 4       | 6206C3 | 6305      | 35         | -   | 100L |
| 22       | 37.5 | 77.5  | 140   | 93.5 | 27 | 129.5 | 59  | 156   | 60  | 45 | 0.5 | 28 | 8  | 7 | 4       | 6206C3 | 6205      | -          | 43  |      |
| 23       | 47   | 119   | 164   | 95   | 27 | 148.5 | 71  | 175   | 60  | 45 | 1.5 | 28 | 8  | 7 | 4       | 6207C3 | 6306      | 49         | -   | 112M |
| 23       | 47   | 89.5  | 162   | 95   | 27 | 148.5 | 71  | 175   | 60  | 45 | 1.5 | 28 | 8  | 7 | 4       | 6207C3 | 6206      | -          | 59  |      |
| 24       | 61   | 141   | 178   | 85   | 35 | 181.5 | 67  | 212   | 80  | 63 | 0.5 | 38 | 10 | 8 | 5       | 6308C3 | 6308      | 73         | 72  | 132S |
| 24       | 61   | 141   | 178   | 104  | 35 | 181.5 | 67  | 212   | 80  | 63 | 0.5 | 38 | 10 | 8 | 5       | 6308C3 | 6308      | 84         | 87  | 132M |
| 22       | 54   | 225   | 224   | 126  | 52 | 226.5 | 70  | 279.5 | 110 | 90 | 2   | 42 | 12 | 8 | 5       | 6310C3 | 6208      | 125        | 119 | 160M |
| -        | 54   | 225   | 224   | 104  | 52 | 226.5 | 70  | 279.5 | 110 | 90 | 2   | 42 | 12 | 8 | 5       | 6310C3 | 6208      | 142        | 139 | 160L |
| -        | -    | 257   | 239   | -    | 91 | 280   | 105 | 345   | 110 | 90 | 0.5 | 48 | 14 | 9 | 5.5     | 6310C3 | 6310      | 211<br>185 | 201 | 180M |




図3



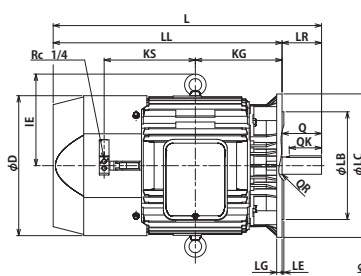


図4

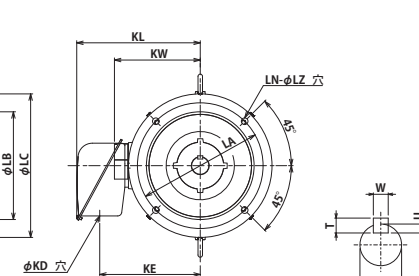

軸端部共通

| 寸 法 (mm) |    |      |     |    |     |    |    |   |     | フランジ<br>番号 | ベアリング番号 |      | 概略重量<br>(kg) |     | 枠番号  |
|----------|----|------|-----|----|-----|----|----|---|-----|------------|---------|------|--------------|-----|------|
| フランジ     |    |      | 軸 端 |    |     |    |    |   |     |            | 4 極以上   |      |              |     |      |
| LG       | LN | LZ   | Q   | QK | QR  | S  | W  | T | U   |            | 負荷側     | 反負荷側 | 4 極          | 6 極 |      |
| -        | -  | -    | -   | -  | -   | -  | -  | - | -   | -          | -       | -    | -            | -   | 63M  |
| 9        | 4  | 10   | 30  | 22 | 1.3 | 14 | 5  | 5 | 3   | FF130      | 6203C3  | 6203 | -            | -   | 71M  |
| 10       | 4  | 12   | 40  | 32 | 0.5 | 19 | 6  | 6 | 3.5 | FF165      | 6204C3  | 6204 | -            | -   | 80M  |
| 10       | 4  | 12   | 50  | 40 | 0.5 | 24 | 8  | 7 | 4   | FF165      | 6205C3  | 6305 | 28           | 25  | 90L  |
| 10       | 4  | 12   | 50  | 40 | 0.5 | 24 | 8  | 7 | 4   | FF165      | 6205C3  | 6205 |              |     |      |
| 16       | 4  | 14.5 | 60  | 45 | 0.5 | 28 | 8  | 7 | 4   | FF215      | 6206C3  | 6305 | 38           | -   | 100L |
| 16       | 4  | 14.5 | 60  | 45 | 0.5 | 28 | 8  | 7 | 4   | FF215      | 6206C3  | 6205 | -            | 46  |      |
| 13       | 4  | 14.5 | 60  | 45 | 1.5 | 28 | 8  | 7 | 4   | FF215      | 6207C3  | 6306 | 51           | -   | 112M |
| 13       | 4  | 14.5 | 60  | 45 | 1.5 | 28 | 8  | 7 | 4   | FF215      | 6207C3  | 6206 | -            | 61  |      |
| 12       | 4  | 14.5 | 80  | 63 | 0.5 | 38 | 10 | 8 | 5   | FF265      | 6308C3  | 6308 | 76           | 75  | 132S |
| 12       | 4  | 14.5 | 80  | 63 | 0.5 | 38 | 10 | 8 | 5   | FF265      | 6308C3  | 6308 | 87           | 90  | 132M |
| 14       | 4  | 18.5 | 110 | 90 | 2   | 42 | 12 | 8 | 5   | FF300      | 6310C3  | 6208 | 130          | 124 | 160M |
| 14       | 4  | 18.5 | 110 | 90 | 2   | 42 | 12 | 8 | 5   | FF300      | 6310C3  | 6208 | 147          | 144 | 160L |
| 15       | 4  | 18.5 | 110 | 90 | 0.5 | 48 | 14 | 9 | 5.5 | FF350      | 6310C3  | 6310 | 190          | 211 | 180M |
|          |    |      |     |    |     |    |    |   |     |            |         |      | 195          |     |      |